




YEA SHIN TECHNOLOGY CO., LTD

1N4933G THRU 1N4937G

FAST RECOVERY GLASS PASSIVATION RECTIFIER

VOLTAGE- 50 to 600 Volts CURRENT - 1.0 Amperes




FEATURES

- High current capability.
- Plastic package has Underwriters Laboratory Flammability Classification 94V-0 utilizing Flame Retardant Epoxy Molding Compound.
- Void-free Plastic in a DO-41 package.
- Exceeds environmental standards of MIL-S-19500/228
- 1 ampere operation at TA=55°C with no thermal runaway.
- Fast switching for high efficiency.
- High temperature soldering : 260°C / 10 seconds at terminals
- Pb free product at available : 99% Sn above meet RoHS environment substance directive request.

MECHANICAL DATA

- Case: Molded plastic, DO-41
- Terminals: Axial leads, solderable to MIL-STD-202, Method 208
- Polarity: Color Band denotes cathode end
- Mounting Position: Any

DO-41 Unit:inch (mm)

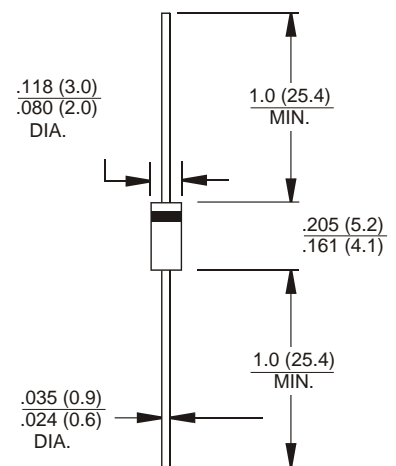

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Resistive or inductive load, 60Hz.

	1N4933G	1N4934G	1N4935G	1N4936G	1N4937G	UNIT
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	V
Maximum RMS Voltage	35	70	140	280	420	V
Maximum DC Blocking Voltage	50	100	200	400	600	V
Maximum Average Forward Current .375"(9.5mm) lead length at TA=55°C	1.0					A
Peak Forward Surge Current, IFSM (surge):8.3ms single half sine-wave superimposed on rated load(JEDEC method)	30.0					A
Maximum Forward Voltage at 1.0A	1.2					V
Maximum Full Load Reverse Current Full Cycle Average .375",9.5mm Lead Length at TA=25°C	5.0					uA
Maximum DC Reverse Current at Rated DC Blocking Voltage TA=100°C	100					uA
Maximum Reverse Recovery Time (Note 1)	200					ns
Typical Junction Capacitance (Note 2)	12					pF
Typical Junction Resistance (Note 3) R θJA	100					°C/ W
Operating and Storage Temperature Range TJ,TSTG	-55 to +150					°C

NOTES:1. Reverse Recovery Test Conditions: IF=.5A, IR=1A, Irr=.25A

2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC

3. Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

DEVICE CHARACTERISTICS

1N4933G THRU 1N4937G

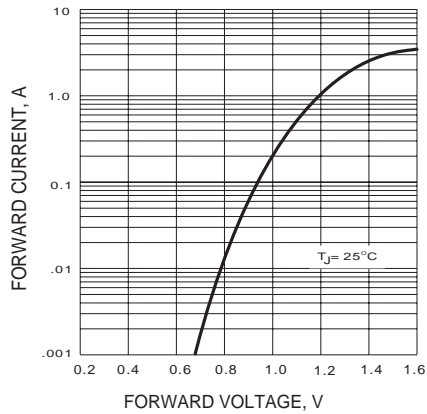


FIG.1 FORWARD CHARACTERISTIC

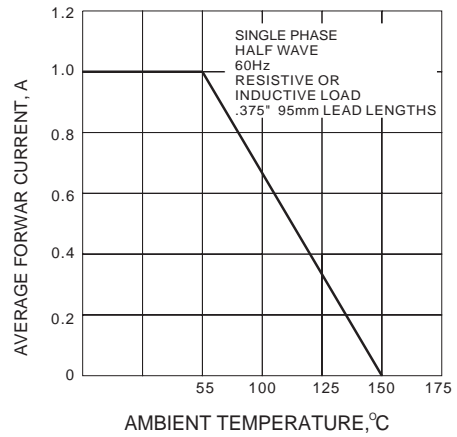


FIG.2 FORWARD CURRENT DERATING CURVE

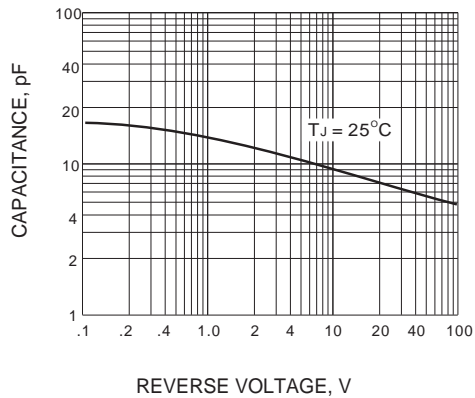


FIG.3 TYPICAL JUNCTION CAPACITANCE

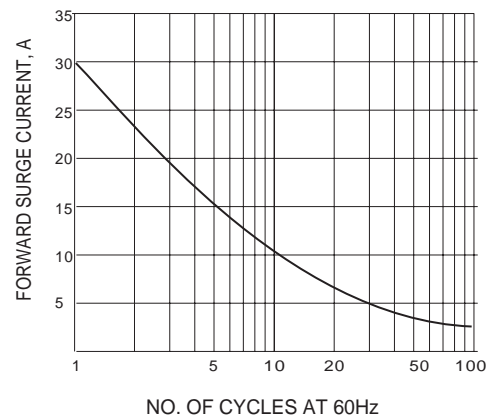


FIG.4 PEAK FORWARD SURGE CURRENT