



YEA SHIN TECHNOLOGY CO., LTD


BAT54

## Dual Series Schottky Barrier Diodes



These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping. Extremely low forward voltage reduces conduction loss. Miniature surface mount package is excellent for hand held and portable applications where space is limited.


- Extremely Fast Switching Speed
- Low Forward Voltage — 0.35 Volts (Typ) @  $I_F = 10 \text{ mAdc}$
- Pb-Free package is available



SOT-23 (TO-236AB)

### DEVICE MARKING AND ORDERING INFORMATION

| Device | Marking | Shipping         |
|--------|---------|------------------|
| BAT54  | JV3     | 3000/Tape & Reel |



### MAXIMUM RATINGS ( $T_J = 125^\circ\text{C}$ unless otherwise noted)

| Rating   | Symbol    | Value       | Unit                       |
|--|-----------|-------------|----------------------------|
| Reverse Voltage  | $V_R$     | 30          | Volts                      |
| Forward Power Dissipation<br>@ $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ | $P_D$     | 225<br>2.0  | mW<br>mW/ $^\circ\text{C}$ |
| Forward Current (DC)   | $I_F$     | 200 Max     | mA                         |
| Junction Temperature   | $T_J$     | 125 Max     | $^\circ\text{C}$           |
| Storage Temperature Range  | $T_{stg}$ | -55 to +150 | $^\circ\text{C}$           |

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) (EACH DIODE)

| Characteristic  | Symbol      | Min | Typ  | Max  | Unit            |
|---|-------------|-----|------|------|-----------------|
| Reverse Breakdown Voltage ( $I_R = 10 \mu\text{A}$ )  | $V_{(BR)R}$ | 30  | —    | —    | Volts           |
| Total Capacitance ( $V_R = 1.0 \text{ V}$ , $f = 1.0 \text{ MHz}$ )                                   | $C_T$       | —   | 7.6  | 10   | pF              |
| Reverse Leakage ( $V_R = 25 \text{ V}$ )  | $I_R$       | —   | 0.5  | 2.0  | $\mu\text{Adc}$ |
| Forward Voltage ( $I_F = 0.1 \text{ mAdc}$ )  | $V_F$       | —   | 0.22 | 0.24 | Vdc             |
| Forward Voltage ( $I_F = 30 \text{ mAdc}$ )   | $V_F$       | —   | 0.41 | 0.5  | Vdc             |
| Forward Voltage ( $I_F = 100 \text{ mAdc}$ )  | $V_F$       | —   | 0.52 | 0.8  | Vdc             |
| Reverse Recovery Time<br>( $I_F = I_R = 10 \text{ mAdc}$ , $I_{R(REC)} = 1.0 \text{ mAdc}$ ) Figure 1 | $t_{rr}$    | —   | —    | 5.0  | ns              |
| Forward Voltage ( $I_F = 1.0 \text{ mAdc}$ )  | $V_F$       | —   | 0.29 | 0.32 | Vdc             |
| Forward Voltage ( $I_F = 10 \text{ mAdc}$ )   | $V_F$       | —   | 0.35 | 0.40 | Vdc             |
| Forward Current (DC)  | $I_F$       | —   | —    | 200  | mAdc            |
| Repetitive Peak Forward Current   | $I_{FRM}$   | —   | —    | 300  | mAdc            |
| Non-Repetitive Peak Forward Current ( $t < 1.0 \text{ s}$ )   | $I_{FSM}$   | —   | —    | 600  | mAdc            |

# DEVICE CHARACTERISTICS

## BAT54

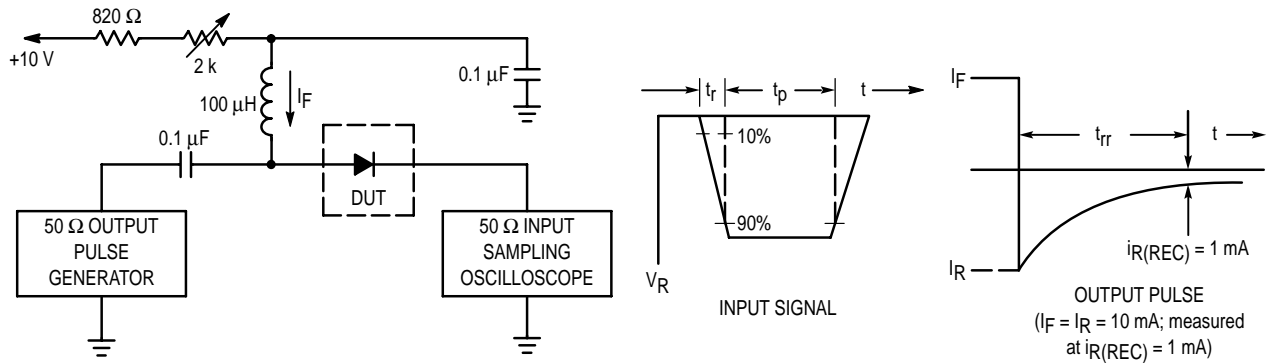


Figure 1. Recovery Time Equivalent Test Circuit

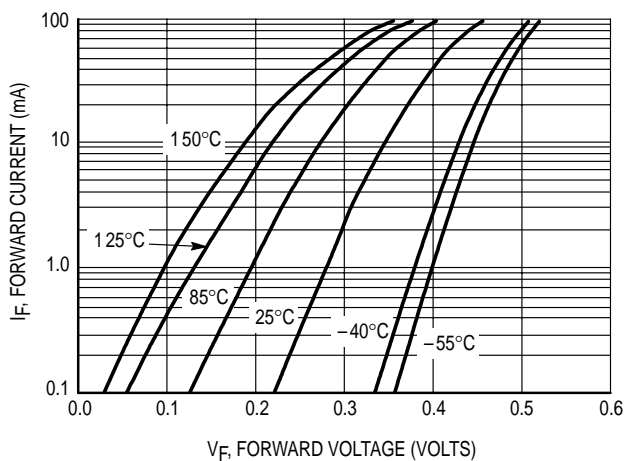


Figure 2. Forward Voltage

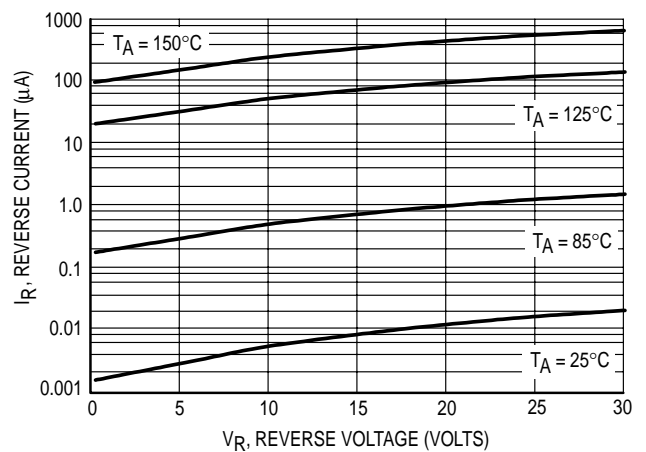


Figure 3. Leakage Current

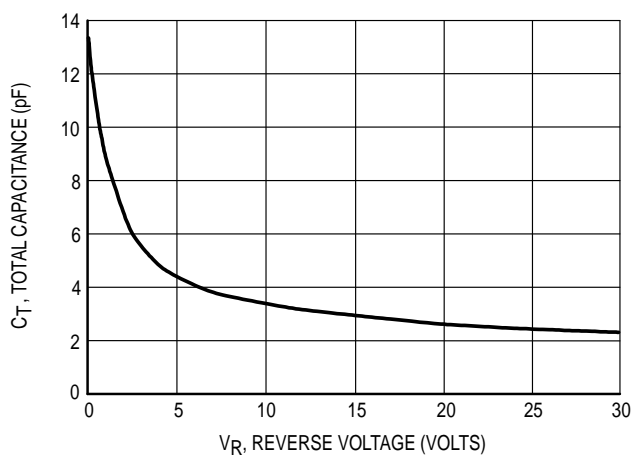


Figure 4. Total Capacitance



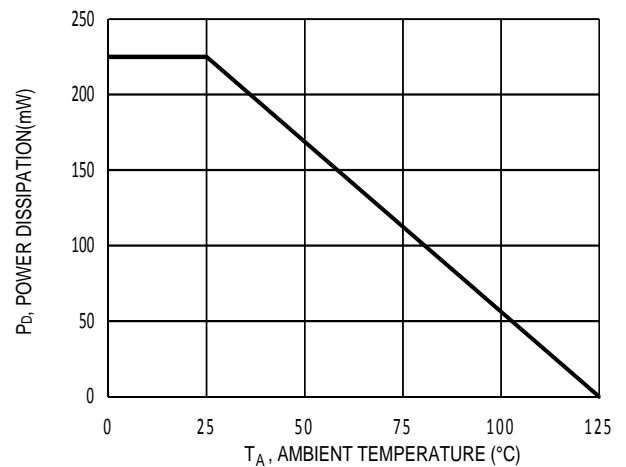


Figure 5. Power derating curve

# PACKAGE OUTLINE AND DIMENSIONS

## BAT54

### SOT-23

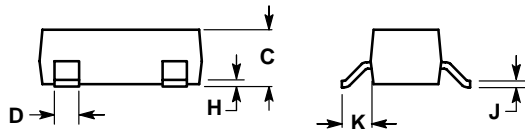

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

| DIM | INCHES |        | MILLIMETERS |       |
|-----|--------|--------|-------------|-------|
|     | MIN    | MAX    | MIN         | MAX   |
| A   | 0.1102 | 0.1197 | 2.80        | 3.04  |
| B   | 0.0472 | 0.0551 | 1.20        | 1.40  |
| C   | 0.0350 | 0.0440 | 0.89        | 1.11  |
| D   | 0.0150 | 0.0200 | 0.37        | 0.50  |
| E   | 0.0701 | 0.0807 | 1.78        | 2.04  |
| F   | 0.0005 | 0.0040 | 0.013       | 0.100 |
| G   | 0.0034 | 0.0070 | 0.085       | 0.177 |
| H   | 0.0140 | 0.0285 | 0.35        | 0.69  |
| I   | 0.0350 | 0.0401 | 0.89        | 1.02  |
| J   | 0.0830 | 0.1039 | 2.10        | 2.64  |
| K   | 0.0177 | 0.0236 | 0.45        | 0.60  |

