




**SUPERFAST RECTIFIER**

**VOLTAGE RANGE 100 to 600 Volts 8.0 Amperes**




**FEATURES**

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0. Flame Retardant Epoxy Molding Compound.
- Low power loss, high efficiency.
- Low forward voltage, high current capability.
- High surge capability
- Ultra fast recovery time,high voltage.
- Lead free in comply with EU RoHS.

**MECHANICAL DATA**

- Case: ITO-220AC molded plastic
- Terminals: solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Mounting Position: Any

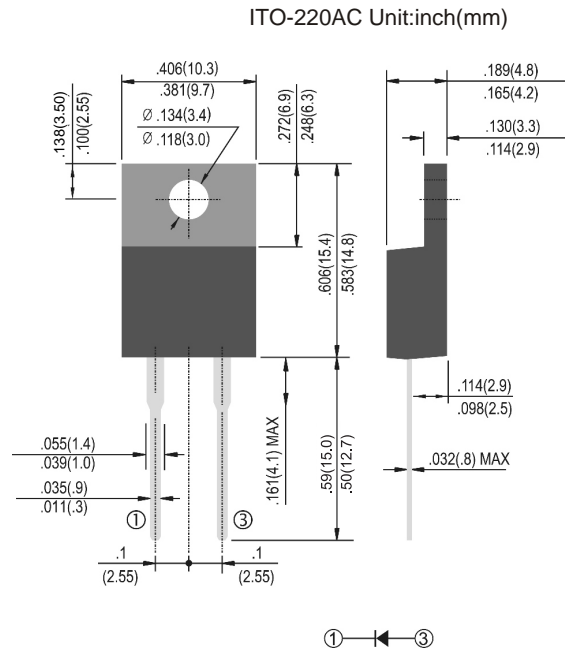

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SF802F	SF803F	SF804F	SF805F	SF806F	SF807F	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	100	200	300	400	500	600	V
Maximum RMS Voltage	$V_{RMS}$	70	140	210	280	350	420	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	300	400	500	600	V
Maximum Average Forward Rectified Current at $T_c=100^\circ C$	$I_{F(AV)}$	8						A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	100						A
Maximum Forward Voltage at 8A	$V_F$	1		1.3		1.7		V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J=25^\circ C$ $T_J=125^\circ C$	$I_R$			10		500		$\mu A$
Maximum Thermal Resistance (Note 2)	$R_{\theta JC}$	5						$^\circ C / W$
Typical Junction Capacitance	$C_J$	80				50		pF
Maximum Reverse Recovery Time (Note 1)	$t_{rr}$	35						ns
Operating Junction and Storage Temperature Range	$T_{J,T_{STG}}$	-55 to +150						$^\circ C$

NOTES:

1. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1A$ ,  $I_{rr}=0.25A$ .
2. Thermal resistance from Junction to ambient and from junction to lead 0.375" (9.5mm) P.C.B mount.

# DEVICE CHARACTERISTICS

## SF802F THRU SF807F

